
Parts Washers Commerical Duty

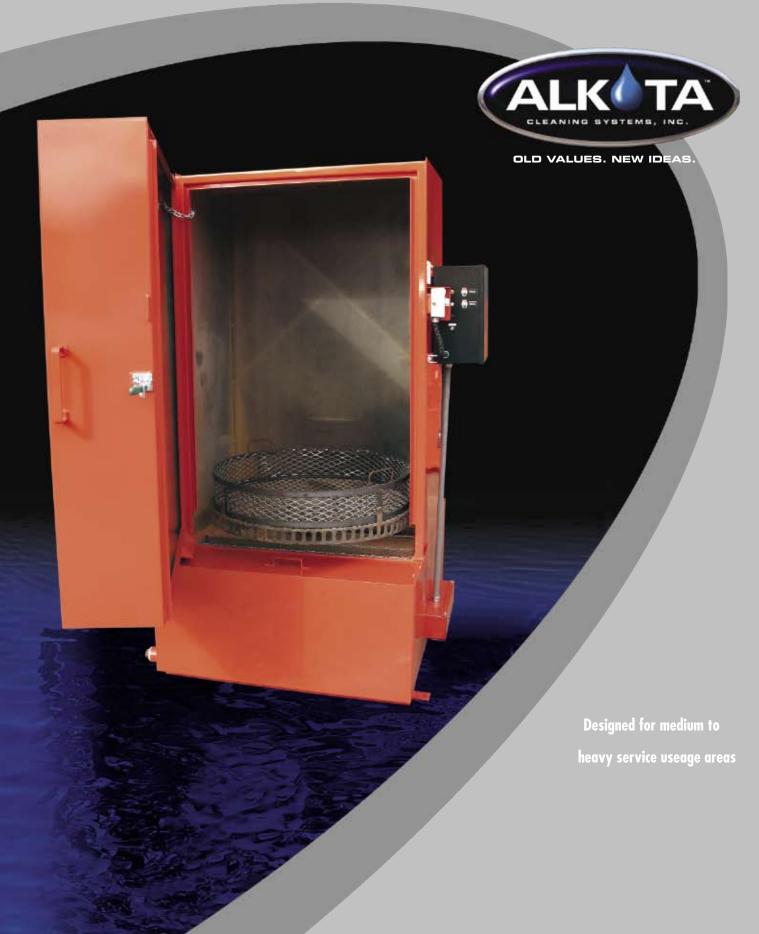

COMMERCIAL DUTY PARTS WASHER SPECIFICATIONS

MODEL	AL3643-2	AL3654-2
TURNTABLE DIAMETER	36" Gear driven	36" Gear driven
WORKING HEIGHT	43"	54"
OVERALL HEIGHT	74"	85"
OVERALL WIDTH	52"	54"
OVERALL DEPTH	54"	54"
TURNTABLE LOAD CAPACITY	3500 lb.	3500 lb.
SOLUTION CAPACITY	167 Gal.	167 Gal.
NOZZLES	26	28
PUMP MOTOR	5 HP, Cast Iron Vertical Sealess Pump	7 1/2 HP, Cast Iron Vertical Sealess Pump
TURNTABLE MOTOR	1/15 HP with Jog Switch	1/15 HP with Jog Switch
PUMP CAPACITY	80 GPM@55 PSI	150 GPM@55 PSI
ELECTRIC WASH HEATER	18 KW Heater	18 KW Heater
VOLTAGE	240 V/480/60 HZ/3 PH	240 V/480/60 HZ/3 PH
TANK DEBRIS SCREEN	210 sq. in.	210 sq. in.
WASH TIMER	60 minute	60 minute
THERMOSTAT SWITCH	Up to 175° F	Up to 175° F
OIL SKIMMER	Stainless disc style with 15 minute timer	Stainless disc style with 15 minute timer
CONSTRUCTION	12 gauge tank and cabinet steel plate	12 gauge tank and cabinet steel plate
HINGED DOOR	Sealess door with handle, latch & safety switch	Sealess door with handle, latch & safety switch
LOWER SPRAY BAR	With nozzles	With nozzles
LOW WATER SHUT OFF	Standard	Standard
SHIPPING WEIGHT	1500 lb	1750 lb

OPTIONS AVAILABLE

- 24-hour, 7-day Heater Timer
- 24-hour, 7-day Skimmer Timer
- 6" diameter Cabinet Vent with inside plate
- Electrical, 1 phase or 460V/60HZ/3PH
- Auto Refill
- Installed Tank Insulation

- Crane Load Slot
- FR-1 Filter Plumbing
- F-1 Filter System
- Stainless Steel Options for Pump, Cabinet, Door, Turntable, Plumbing, Spray Nozzles
- Natural/LP Gas Heat



OLD VALUES. NEW IDEAS.

