
Parts Washers Industrial Duty

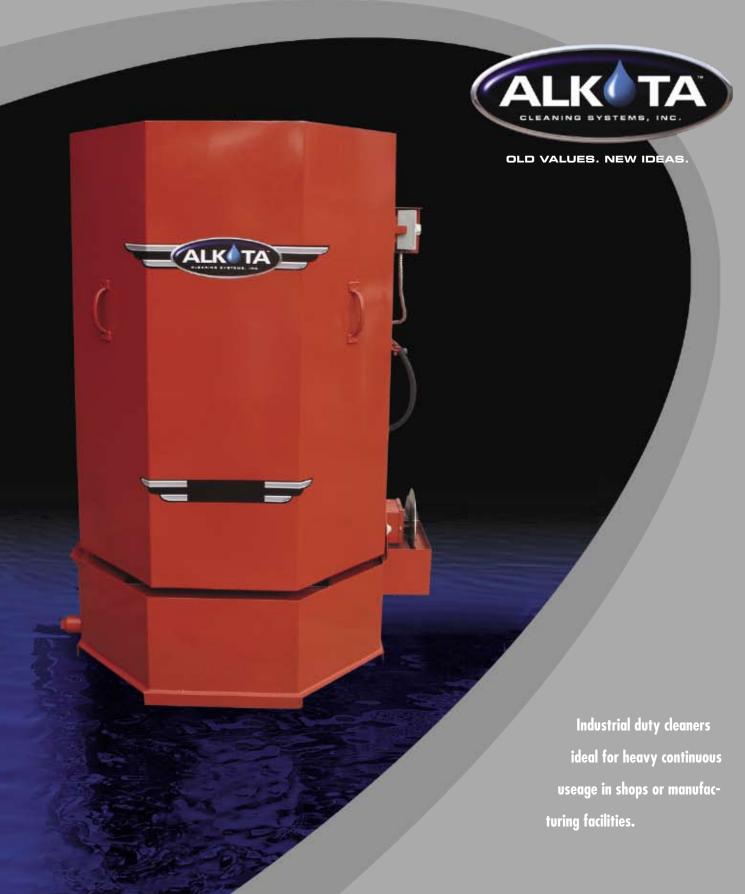

INDUSTRIAL DUTY PARTS WASHER SPECIFICATIONS

MODEL	AL2735-3	AL3640-3
TURNTABLE DIAMETER	27"	36"
WORKING HEIGHT	35″	40"
OVERALL HEIGHT	48"	61"
OVERALL WIDTH	45"	54"
OVERALL DEPTH	70"	74"
TURNTABLE LOAD LIMIT	1000 lb.	1500 lb.
SOLUTION CAPACITY	94 Gal.	192 Gal.
NOZZLES	15	28
PUMP MOTOR	3 HP, Cast Iron Vertical Sealess Pump	5 HP, Cast Iron Vertical Sealess Pump
TURNTABLE MOTOR	1/20 HP Gear Driven	1/20 HP Gear Driven
PUMP CAPACITY	50 GPM@55 PSI	80 GPM@55 PSI
ELECTRIC WASH HEATER	13.5 KW Heater	18 KW Heater
VOLTAGE	240 V/60 HZ/3 PH	240V/60 HZ/3 PH
TANK DEBRIS SCREEN	132 sq. in.	500 sq. in.
WASH TIMER	60 minute	60 minute
THERMOSTAT SWITCH	Up to 175° F	Up to 175° F
OIL SKIMMER	Stainless disc style	Stainless disc style
CONSTRUCTION	10 gauge tank, 12 gauge door and cabinet steel plate	10 gauge tank, 12 gauge door and cabinet steel plate
HINGED DOOR	Sealess door with handle, latch & safety switch	Sealess door with handle, latch & safety switch
LOW WATER SHUT OFF	Standard	Standard
INTERMEDIATE SPRAY BAR	Optional	Standard
SHIPPING WEIGHT	850 lb	1300 lb

OPTIONS AVAILABLE

- 24-hour, 7-day Heater Timer
- 24-hour, 7-day Skimmer Timer
- Turntable Jog Switch
- Electrical, 1 phase (AL2735-3 only)
- Electrical, 460V/60HZ/3PH
- Auto Refill
- Installed Tank Insulation

- FR-1 Filter Plumbing
- F-1 Filter System
- Stainless Steel Options for Pump, Cabinet, Door, Turntable, Plumbing, Spray Nozzles
- Natural/LP Gas Heat
- Turntable double basket (removable)
- Casters



OLD VALUES. NEW IDEAS.

